

The location where the Wieland plug connects is shown in **Figure 1**

Figure 2 shows the pin assignments of the connector.

Pin 1 = L1

Pin 2 = L2

Pin 3 = L3

Pin 4 = Neutral

Outer housing = GND

Figure 3 shows the components of the Wieland connector (including the different adapters).

The NPT strain relief needs to be provided by the end-user, depending on the cable they provide.

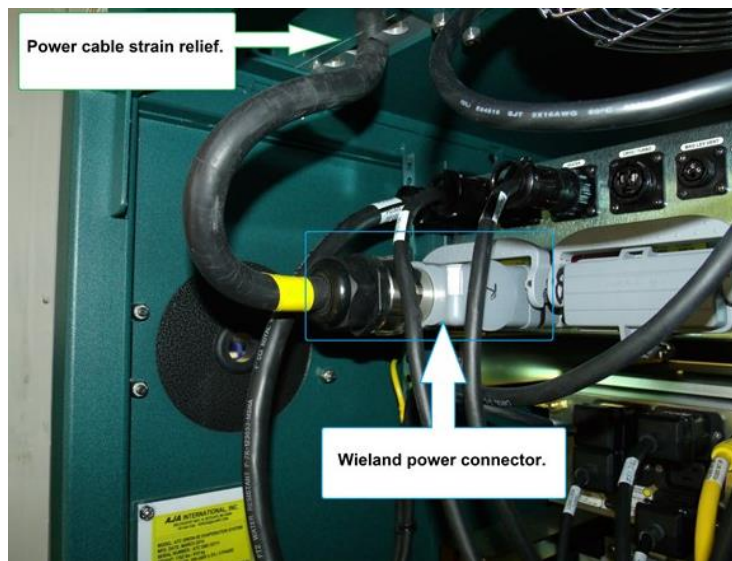


Figure 1

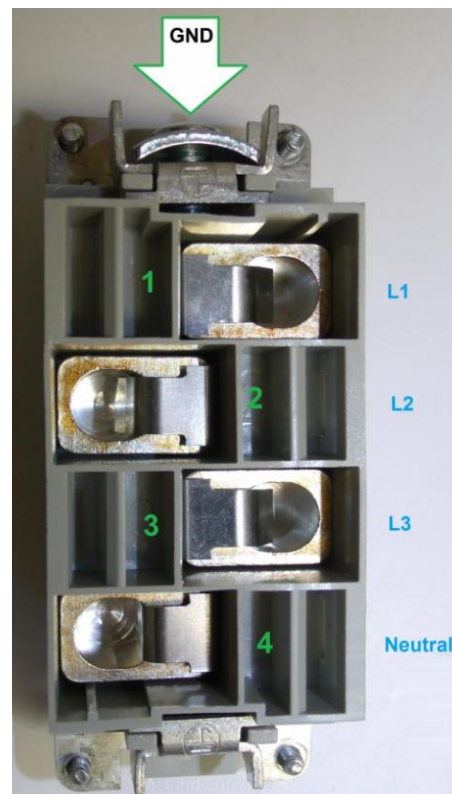


Figure 2

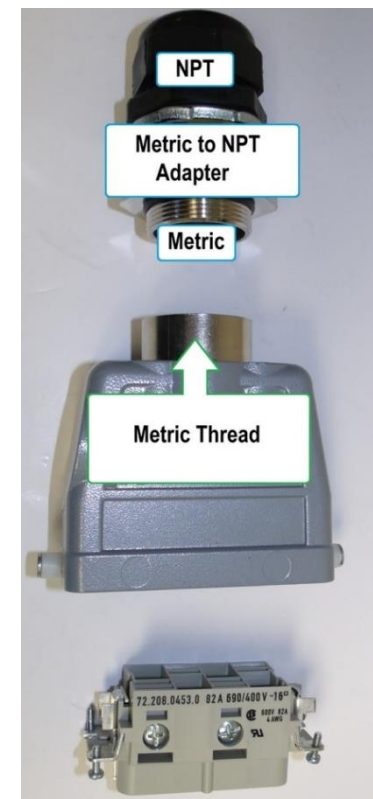


Figure 3